

20/25/30/33DT-7

Diesel Counterbalance Trucks

MOVING YOU FURTHER

HYUNDAI HEAVY INDUSTRIES



* Some of the photos may include optional equipment.

 **HYUNDAI**
HEAVY INDUSTRIES

Your satisfaction is our priority!

Hyundai introduces a new line of 7-series diesel forklift trucks.

The newly designed 4 wheel counterbalance trucks provide
every operator comfortable driving, increased productivity and easy maintenance.



New Diesel Forklift with Proven Quality and Advanced Technology

- Maximum performance
- Spacious operator's cab
- Easy serviceability
- Load weight indicator (Optional)
- OPSS System for safe operation (Optional)



* Some of the photos may include optional equipment.

High Efficiency & Optimal Performance



* Some of the photos may include optional equipment.

Excellent and Economical Hyundai WIA WC30D engine

60PS / 2,500 rpm

Market approved quality of Hyundai WIA WC30D engine ensures incomparable performance, durability and excellent fuel efficiency.

This engine meets EPA Tier 3 and EU stage IIIA emission regulations.

- Excellent engine Durability applied Timing Gear
- Rapid Acceleration Smoke Decrease
- Apply Friction Gear For Reducing Gear Rattle Noise
- One Shot Start at -25°C installed Cold Start Device



Powerful engine and high technology systems
provide you with enhanced performance
and highest productivity.

20/25/30/33DT-7




Highly durable drive axle

The strengthened drive axle separable from transmission ensures low vibration and easy maintenance. The wet disc type brake is applied for easy operation, smooth response and maintenance free.



Wet disc brake system

The wet disc brake system is virtually maintenance free and is enclosed to protect from dust and water.

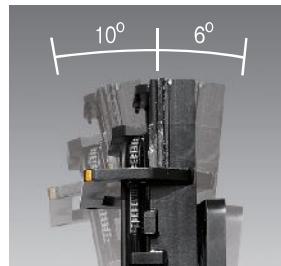

Increased mast tilting angle

Utilizing the standard mast tilting angle of 6 degrees forward and 10 degrees backward, the operator can safely and rapidly perform loading and unloading jobs.



Fully hydrostatic power steering

The hydraulic steering system always guarantees smooth and flexible steering, preventing over-run and kick-back.



Travel Speed (Max)

Model	km / h
20DT	20.5
25DT	20.5
30DT	21.5
33DT	21.4

Gradeability (Max)

Model	deg
20DT	20.5
25DT	17.8
30DT	14.6
33DT	13.5

Faster travel speed & gradeability

The powerful high-output engine provides greater acceleration, better gradeability and faster travel speed on any tough terrain or slope.

Best Convenience & Optimized Ergonomics



Spacious operator over head guard

The newly designed cabin provides wide visibility and spacious environment, ensuring all day comfort for the operator.



Optimized pedal position

On the 7-series the pedals are mounted to the console to reduce operator fatigue, and noise and dust from the engine compartment.



Low entrance height

The low entrance height ensures easy and safe access for the operator.



Cup holder & console box

Additional storage spaces are located inside the operating space for operator's convenience.




Comfortable Seat

Easily adjustable suspension seat, based on a human engineering design, reduces operator fatigue and provides greater comfort.
*ELR (Energy Locking Retractor) Type Seat Belt

The ergonomically designed cabin and the centralized cluster provides full support and comfort to the operator.

20/25/30/33DT-7

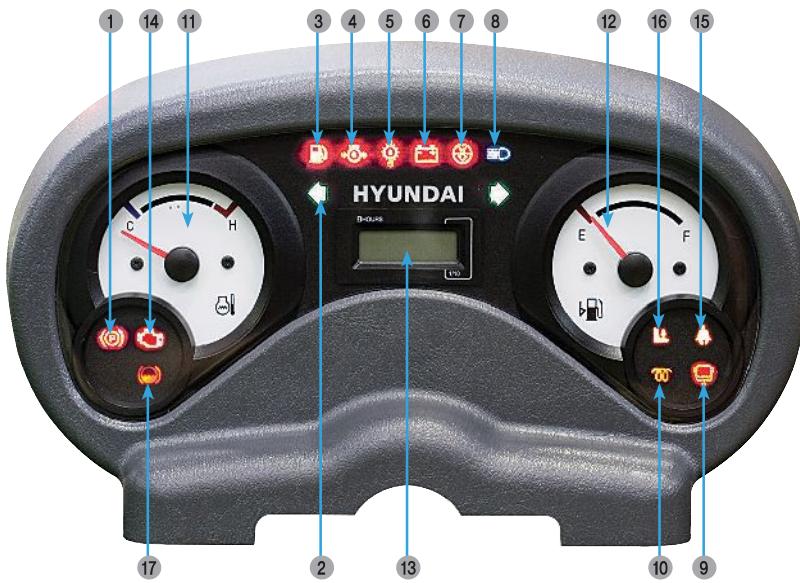

- 1 Parking brake lamp
- 2 Directional indicators
- 3 Fuel warning lamp
- 4 Engine oil warning lamp
- 5 Transmission oil temperature warning lamp
- 6 Battery charging warning lamp
- 7 Air cleaner filter warning lamp
- 8 Working light indicator
- 9 Water separator gauge
- 10 Pre-heater indicator
- 11 Water temperature gauge
- 12 Fuel gauge
- 13 Hour meter
- 14 Engine check lamp
- 15 Seat belt warning
- 16 OPSS warning(OPTION)
- 17 Brake oil level lamp

Operator friendly gauges and water-resistant monitor panel



Adjustable steering wheel

To achieve a comfortable drive position, the angle of the steering column can easily be adjusted by a lever on the right-hand side of the steering column.



Easy and safe shift lever

A single lever on the left side of the steering column gives the operator fast, easy control of direction.



Multi-function switch lever

Multi-functional switch lever gives easy access to lights and turning signal.



Quick response of operating control levers

Only minimal operator's effort is required for precise, safe and productive control.

Advanced Safety



Excellent visibility for safe operation

Optimized lift cylinder arrangement provides operator with wider visibility.
The panoramic mirror expands the driver's view when backing up.

* Some of the photos may include optional equipment.



Strong overhead guard

Exceeding CEE and ANSI regulations, the overhead guard offers optimal protection combined with excellent all round visibility.



Convenient hand grip



Parking brake

Ratchet type parking brake requires less efforts from the operator to set.

The safely designed driver's space makes your operating more comfortable.

20/25/30/33DT-7

Fork safety features

When the forks are being lowered, a down-control valve maintains the controlled speed. The down-safety valve prevents forks from dropping down in case of sudden damage of hydraulic line.

OPSS(Operator Presence Sensing System) (Option)

All mast and drive movements stop functioning when the operator is not in the seat.

Lift Lock Tilt Lock Drive Lock Parking



Heavy duty single frame

Heavy duty single unit type frame, designed on the basis of accurate structural analysis, guaranteeing durability and safety.




* Some of the photos may include optional equipment.



Bright, protected headlights

Bright, protected headlights is positioned for exceptional visibility.

Fast and Easy Maintenance

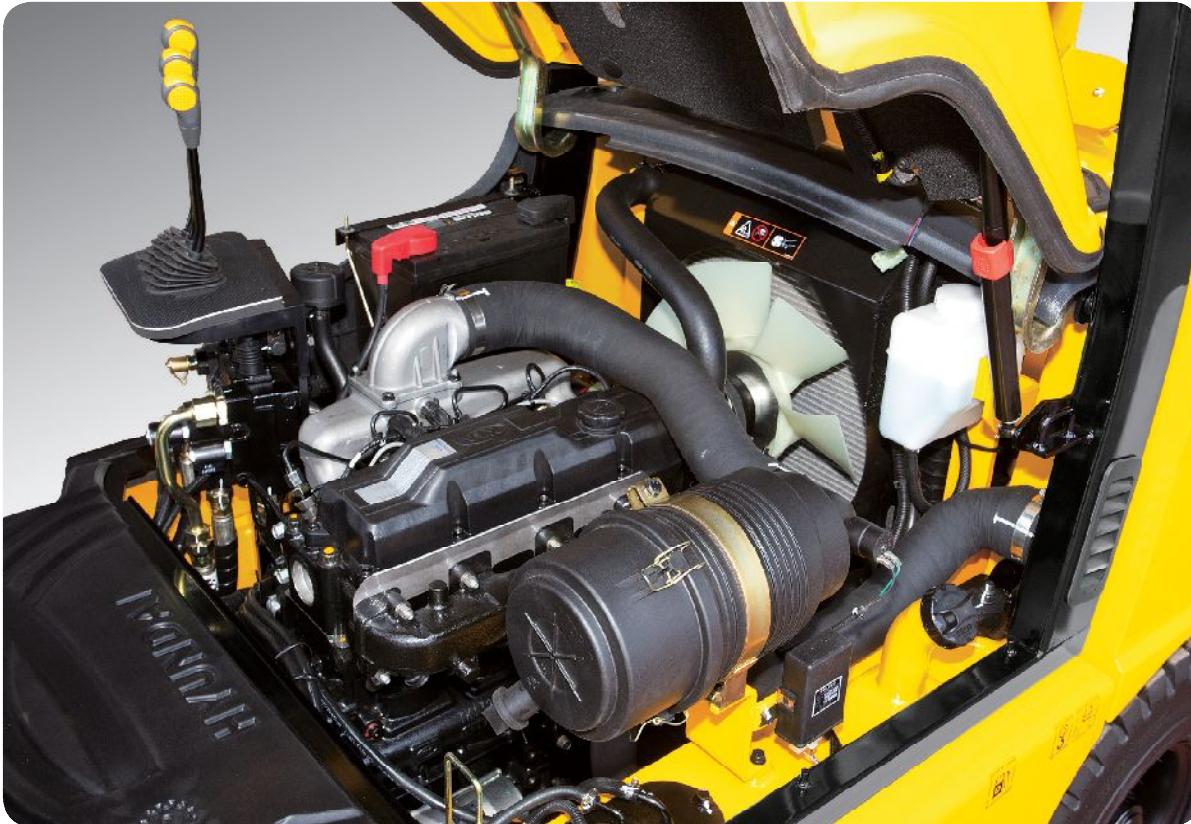

Large open engine hood

Highly accessible engine compartment assures fast and efficient maintenance.

* Some of the photos may include optional equipment.



Easy change air cleaner

The air filter is readily accessible for cleaning or replacement.




Brake fluid reservoir with level switch

When brake oil level becomes lower than Min. the warning lamp on the cluster lights on.



Electrically monitored air filter

Air cleaner sensor alerts the operator of a restricted air filter and allows replacement before damage.

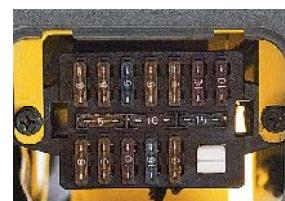

An accessible, compact fuse box for easy inspection

An ideal arrangement of components
ensures easy access and
convenience for maintenance.


20/25/30/33DT-7



* Some of the photos may include optional equipment.



Portable side cover

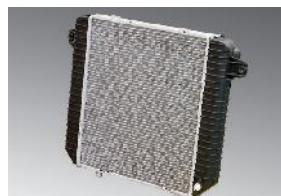

Aluminum radiator
with superb protection
against heat



Engine oil condition check



Tool-less floor plate for
serviceability.

7 Series

Mast Specification (20DT)

Mast Type	Maximum Fork Height (mm)	Overall Height Lowered (mm)	Free Lift Height (mm)		Tilt Angle (Fwd / Bwd)	Load capacity w/o side shift at 500 mm LC (kg)		Load capacity w side shift at 500 mm LC (kg)		Truck Weight Unload (kg)	
			With bkr	With / o bkr		Single Tire	Double Tire	Single Tire	Double Tire	Single Tire	Double Tire
	20DT	20DT	20DT	20DT	20DT	20DT	20DT	20DT	20DT	20DT	20DT
2- Stage Limited free lift	V300	3000	2025	155	155	6 / 10	2000	2000	2000	2000	3390
	* V330	3300	2175	155	155	6 / 10	2000	2000	2000	2000	3410
	V350	3500	2275	155	155	6 / 10	2000	2000	2000	2000	3427
	V370	3700	2425	155	155	6 / 10	2000	2000	2000	2000	3449
	V400	4000	2575	155	155	6 / 10	2000	2000	2000	2000	3479
	V430	4300	2725	155	155	6 / 6	2000	2000	1925	2000	3531
	V450	4500	2875	155	155	6 / 6	1970	2000	1895	2000	3553
	V470	4700	2975	155	155	6 / 6	1940	2000	1865	1925	3567
2- Stage full free lift	V500	5000	3125	155	155	6 / 6	1900	1940	1825	1865	3589
	VF290	2900	2025	845	1377	6 / 6	2000	2000	2000	2000	3425
	VF320	3200	2175	995	1527	6 / 6	2000	2000	2000	2000	3459
	TF / TS370	3700	1825	645	1177	6 / 6	2000	2000	2000	2000	3516
3-Stage full free lift	TF / TS400	4000	1925	745	1277	6 / 6	2000	2000	1925	2000	3540
	TF / TS430	4300	2025	845	1377	6 / 6	1950	2000	1875	1925	3558
	TF / TS450	4500	2125	945	1477	6 / 6	1930	1960	1855	1885	3580
	TF / TS470	4700	2175	995	1527	6 / 6	1890	1930	1815	1855	3593
	TF / TS500	5000	2275	1095	1627	6 / 6	1840	1890	1765	1815	3615
	TF / TS550	5500	2475	1295	1827	6 / 6	1770	1810	1695	1735	3654
	TF / TS600	6000	2675	1495	2027	6 / 6	1400	1750	1325	1675	3719
	QF610	6115	2177	997	1512	3 / 3	1480	1490	1405	1415	3961
4-Stage full free lift	QF660	6615	2377	1197	1712	3 / 3	1380	1400	1305	1325	4021
	QF700	7015	2477	1297	1812	3 / 3	1180	1310	1105	1235	4052
	QF745	7465	2627	1447	1962	3 / 3	900	1210	825	1135	4097
	QF790	7915	2777	1597	2112	3 / 3	600	810	525	735	4198
	QF790	7915	2777	1597	2112	3 / 3	650	910	575	835	4512

* Standard

Mast Specification (25DT)

Mast Type	Maximum Fork Height (mm)	Overall Height Lowered (mm)	Free Lift Height (mm)		Tilt Angle (Fwd / Bwd)	Load capacity w/o side shift at 500 mm LC (kg)		Load capacity w side shift at 500 mm LC (kg)		Truck Weight Unload (kg)	
			With bkr	With / o bkr		Single Tire	Double Tire	Single Tire	Double Tire	Single Tire	Double Tire
	25DT	25DT	25DT	25DT	25DT	25DT	25DT	25DT	25DT	25DT	25DT
2- Stage Limited free lift	V300	3000	2025	155	155	6 / 10	2500	2500	2500	2500	3703
	* V330	3300	2175	155	155	6 / 10	2500	2500	2500	2500	3723
	V350	3500	2275	155	155	6 / 10	2500	2500	2500	2500	3740
	V370	3700	2425	155	155	6 / 10	2500	2500	2425	2500	3762
	V400	4000	2575	155	155	6 / 10	2460	2500	2385	2425	3792
	V430	4300	2725	155	155	6 / 6	2410	2470	2335	2395	3843
	V450	4500	2875	155	155	6 / 6	2350	2430	2275	2355	3865
	V470	4700	2975	155	155	6 / 6	2320	2410	2245	2335	3880
2- Stage full free lift	V500	5000	3125	155	155	6 / 6	2260	2350	2185	2275	3902
	VF290	2900	2025	845	1377	6 / 6	2500	2500	2500	2500	3739
	VF320	3200	2175	995	1527	6 / 6	2500	2500	2500	2500	3772
	TF / TS370	3700	1825	645	1177	6 / 6	2450	2500	2375	2425	3829
3-Stage full free lift	TF / TS400	4000	1925	745	1277	6 / 6	2400	2470	2325	2395	3853
	TF / TS430	4300	2025	845	1377	6 / 6	2340	2410	2265	2335	3871
	TF / TS450	4500	2125	945	1477	6 / 6	2310	2380	2235	2305	3893
	TF / TS470	4700	2175	995	1527	6 / 6	2260	2340	2185	2265	3907
	TF / TS500	5000	2275	1095	1627	6 / 6	2210	2280	2135	2205	3929
	TF / TS550	5500	2475	1295	1827	6 / 6	1600	2210	1525	2135	3968
	TF / TS600	6000	2675	1495	2027	6 / 6	1050	2110	975	2035	4033
	QF610	6115	2177	997	1512	3 / 3	1580	1810	1505	1735	4275
4-Stage full free lift	QF660	6615	2377	1197	1712	3 / 3	1480	1720	1405	1645	4335
	QF700	7015	2477	1297	1812	3 / 3	1230	1630	1155	1555	4365
	QF745	7465	2627	1447	1962	3 / 3	950	1520	875	1445	4411
	QF790	7915	2777	1597	2112	3 / 3	650	910	575	835	4512
	QF790	7915	2777	1597	2112	3 / 3	600	810	525	735	4680

* Standard

20/25/30/33DT-7

Mast Specification (30DT)

Mast Type	Maximum Fork Height (mm)	Overall Height Lowered (mm)	Free Lift Height (mm)		Tilt Angle (Fwd / Bwd)	Load capacity w/o side shift at 500 mm LC (kg)		Load capacity w side shift at 500 mm LC (kg)		Truck Weight Unload (kg)	
			With bkr	With o bkr		Single Tire	Double Tire	Single Tire	Double Tire	Single Tire	Double Tire
	30DT	30DT	30DT	30DT	30DT	30DT	30DT	30DT	30DT	30DT	30DT
2- Stage Limited free lift	V300	3000	2040	155	155	6 / 10	2900	2900	2900	2900	4158
	* V330	3300	2190	155	155	6 / 10	2900	2900	2900	2900	4179
	V350	3500	2290	155	155	6 / 10	2900	2900	2900	2900	4196
	V370	3700	2440	155	155	6 / 10	2900	2900	2900	2900	4219
	V400	4000	2590	155	155	6 / 10	2900	2900	2880	2880	4250
	V430	4300	2740	155	155	6 / 6	2900	2900	2800	2850	4303
	V450	4500	2890	155	155	6 / 6	2850	2900	2750	2820	4325
	V470	4700	2990	155	155	6 / 6	2880	2880	2700	2780	4341
2- Stage full free lift	V500	5000	3140	155	155	6 / 6	2750	2820	2650	2720	4363
	VF290	2900	2040	860	1314	6 / 6	2900	2900	2900	2980	4216
	VF320	3200	2190	1010	1464	6 / 6	2900	2900	2900	2980	4251
	TF / TS370	3700	1840	660	1114	6 / 6	2900	2900	2880	2880	4325
3-Stage full free lift	TF / TS400	4000	1940	760	1214	6 / 6	2880	2900	2780	2850	4350
	TF / TS430	4300	2040	860	1314	6 / 6	2830	2880	2730	2780	4372
	TF / TS450	4500	2140	960	1414	6 / 6	2780	2830	2680	2730	4397
	TF / TS470	4700	2190	1010	1464	6 / 6	2750	2790	2650	2690	4411
	TF / TS500	5000	2290	1110	1564	6 / 6	2680	2730	2580	2630	4434
	TF / TS550	5500	2490	1310	1764	6 / 6	2580	2630	2480	2530	4478
	TF / TS600	6000	2690	1510	1964	6 / 6	1880	2530	1780	2430	4548
	QF610	6115	2175	955	1449	3 / 3	1780	2270	1680	2170	4735
4-Stage full free lift	QF660	6615	2375	1195	1649	3 / 3	1670	2160	1570	2060	4794
	QF700	7015	2475	1295	1749	3 / 3	1370	2050	1270	1950	4825
	QF745	7465	2625	1445	1899	3 / 3	1050	1920	950	1820	4871
	QF790	7915	2775	1595	2049	3 / 3	750	1090	650	990	4971
											5076



* Standard

Mast Specification (33DT)

Mast Type	Maximum Fork Height (mm)	Overall Height Lowered (mm)	Free Lift Height (mm)		Tilt Angle (Fwd / Bwd)	Load capacity w/o side shift at 500 mm LC (kg)		Load capacity w side shift at 500 mm LC (kg)		Truck Weight Unload (kg)	
			With bkr	With o bkr		Single Tire	Double Tire	Single Tire	Double Tire	Single Tire	Double Tire
	33DT	33DT	33DT	33DT	33DT	33DT	33DT	33DT	33DT	33DT	33DT
2- Stage Limited free lift	V300	2900	2040	155	155	6 / 10	3300	3300	3300	3300	4429
	* V330	3200	2190	155	155	6 / 10	3300	3300	3300	3300	4453
	V350	3400	2290	155	155	6 / 10	3300	3300	3300	3300	4468
	V370	3600	2440	155	155	6 / 10	3300	3300	3200	3300	4492
	V400	3900	2590	155	155	6 / 10	3240	3300	3140	3200	4524
	V430	4200	2740	155	155	6 / 6	3160	3260	3060	3160	4578
	V450	4400	2890	155	155	6 / 6	3110	3210	3010	3110	4601
	V470	4600	2990	155	155	6 / 6	3050	3160	2950	3060	4617
2- Stage full free lift	V500	4900	3140	155	155	6 / 6	3010	3090	2910	2990	4641
	VF290	2900	2040	910	1269	6 / 6	3300	3300	3300	3300	4471
	VF320	3200	2190	1060	1419	6 / 6	3300	3300	3300	3300	4506
	TF / TS370	3700	1890	710	1069	6 / 6	3200	3300	3100	3200	4614
3-Stage full free lift	TF / TS400	4000	1990	810	1169	6 / 6	3110	3220	3010	3120	4636
	TF / TS430	4300	2090	910	1269	6 / 6	3040	3130	2940	3030	4657
	TF / TS450	4500	2190	1010	1369	6 / 6	3000	3090	2900	2990	4678
	TF / TS470	4700	2240	1060	1419	6 / 6	2950	3030	2850	2930	4692
	TF / TS500	5000	2340	1160	1519	6 / 6	2900	2980	2800	2880	4714
	TF / TS550	5500	2540	1360	1719	6 / 6	2000	2870	1900	2770	4758
	TF / TS600	6000	2740	1560	1919	6 / 6	1100	2760	1000	2660	4831
	QF610	6115	2225	1045	1449	3 / 3	1870	2720	1770	2620	4957
4-Stage full free lift	QF660	6615	2425	1245	1649	3 / 3	1780	2590	1680	2490	5017
	QF700	7015	2525	1345	1749	3 / 3	1480	2470	1380	2370	5047
	QF745	7465	2675	1495	1899	3 / 3	1000	2340	900	2240	5090
	QF790	7915	2825	1645	2049	3 / 3	500	1220	400	1120	5193
											5290

* Standard

Dimension

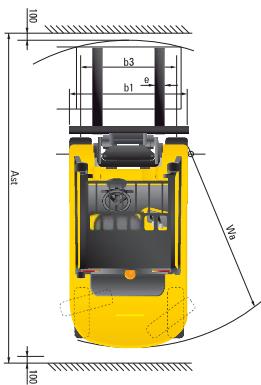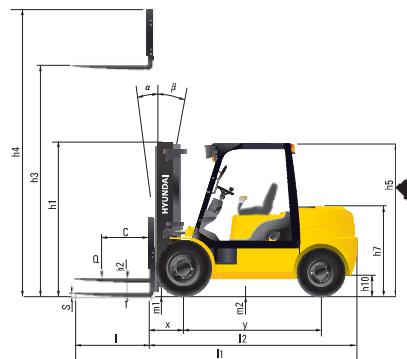


Specification

Identification					
1.1	Manufacturer	Hyundai	Hyundai	Hyundai	Hyundai
1.2	Manufacturer's type designation	20DT-7	25DT-7	30DT-7	33DT-7
1.3	Drive: electric(battery or mains),diesel,petrol,fuel gas,manual	DIESEL	DIESEL	DIESEL	DIESEL
1.4	Type of operation:hand,pedestrian,standing,seated,order-picker	seated	seated	seated	seated
1.5	Load capacity / rated load	kg	2,000	2,500	2,980
1.6	Load center distance	c mm	500	500	500
1.8	Load distance, center of drive axle to fork	x mm	468	468	468
1.9	Wheelbase	y mm	1,650	1,650	1,700
Weights					
2.1	Service weight(including battery)	kg	3,417	3,731	4,212
2.2	Axle loading, loaded front/rear	kg	4,732 / 685	5,460 / 771	6,183 / 929
2.3	Axle loading, unloaded front/rear	kg	1,558 / 1,859	1,493 / 2,238	1,631 / 2,581
Wheels, Chassis					
3.1	Tires:solid rubber, superelastic, pneumatic, polyurethane	Pneumatic	Pneumatic	Pneumatic	Pneumatic
3.2	Tires size, front	7.00-12-12PR	7.00-12-12PR	8.15-15-14PR	8.15-15-14PR
3.3	Tires size, rear	6.50-10-12PR	6.50-10-12PR	6.50-10-12PR	6.50-10-12PR
3.5	Wheels, number front x rear(x=driven wheels)	2x / 2	2x / 2	2x / 2	2x / 2
3.6	Track width, front	mm	965	965	1,005
3.7	Track width, rear	mm	980	980	980
Basic Dimensions					
4.1	Mast / fork carriage tilt forward / backward	degrees	6 / 10	6 / 10	6 / 10
4.2	Lowered mast height	h1 (mm)	2,025	2,025	2,040
4.3	Free lift	h2 (mm)	155	155	155
4.4	Lift height	h3 (mm)	3,005	3,005	3,005
4.5	Extended mast height	h4 (mm)	4,185	4,185	4,185
4.7	Overhead load guard(cab) height	h5 (mm)	2,160	2,160	2,180
4.8	Seat height / standing height	h7 (mm)	1,110	1,110	1,130
4.12	Coupling height	h10 (mm)	283	283	299
4.19	Overall length	l1 (mm)	3,597	3,657	3,742
4.20	Length to face of forks	l2 (mm)	2,547	2,607	2,692
4.21	Overall width	b1 (mm)	1,160 / 1,515	1,160 / 1,515	1,230 / 1,515
4.22	Fork dimensions(hook type)	l / e / s (mm)	1,050x100x45	1,050x100x45	1,050x122x45
4.23	Fork carriage ISO 2328, class / type A,B	ll / A	ll / A	III / A	III / A
4.24	Fork-carriage width	b3 (mm)	1,102	1,102	1,102
4.31	Ground clearance, loaded, under mast	m1(mm)	130	130	145
4.32	Ground clearance, centre of wheelbase	m2(mm)	171	171	189
4.33	Aisle width for pallets 1,000x1,200 crossways(LxW)	Ast(mm)	3,928	3,981	4,066
4.34	Aisle width for pallets 800x1,200 lengthways(WxL)	Ast(mm)	4,128	4,181	4,266
4.35	Turning radius	Wa(mm)	2,260	2,313	2,398
Performance Data					
5.1	Travel speed, unloaded	km/h	20.5	20.5	21.5
5.2	Lift speed, loaded/ unloaded	mm/s	600 / 610	590 / 600	490 / 500
5.3	Lowering speed, loaded/unloaded	mm/s	500 / 450	500 / 450	500 / 450
5.5	Drawbar pull, loaded	kg	2,118	2,134	2,024
5.7	Gradient performance, loaded/ unloaded	%	37.3	32.2	26.0
5.10	Service brake	Foot	Foot	Foot	Foot
Engine					
6.1	Engine manufacturer / type	HYUNDAI WIA / WC30D			
6.2	Rated output	ps/rpm	60 / 2,500	60 / 2,500	60 / 2,500
6.3	Maximum torque	kgf.m/rpm	18.7 / 1,800	18.7 / 1,800	18.7 / 1,800
6.4	No. of cylinder / cubic capacity	EA/cc	4 / 2,957	4 / 2,957	4 / 2,957
6.5	Oil volume	ℓ	54	54	54
Other Details					
8.2	Operating pressure(system / attach)	kgf/cm ²	200 / 165	200 / 165	200 / 165
	Attach oil volume (Max.)	ℓ/min	54	54	54




20/25/30/33DT-7

Load Capacity



20DT-7



25DT-7



30DT-7



33DT-7

Various Attachments

Side Shift



Hinged Fork



Hinged Bucket



Rotating Fork



Push Pull




Rotating Roll Clamp




Load Stabilizer




Carton Clamp




Pallet Invert




Drum Clamp



Bale Clamp



Load Extender



Fork Positioner



Optional Items

- Cabin & Heater
- Sideshift, Fork Positioner
- Integrated Sideshift, Integrated Sideshift with Fork Positioner (Sync)
- Fork (mm)
 - 20/25DT-7 900 / 1,000 / 1,200 / 1,350 / 1,500 / 1,650 / 1,800 (1,050 STD)
 - 30/33DT-7 900 / 1,150 / 1,200 / 1,350 / 1,500 / 1,650 / 1,800 / 2,400 (1,050 STD)
- Overshoe(mm)
 - 20/25DT-7 1,300 / 1,500 / 1,700 / 1,800
 - 30/33DT 1,500 / 1,700 / 1,800
- Tilting
 - 6° / 6°, 3° / 3°

- Tire
 - Solid, Non-marking
 - Double tire (Front)
- Exhaust (Horizontal)
- Master S/W
- MCV
- 4-SPOOL
- MAST
 - 2-Stage full free lift
 - 3-Stage full free lift
 - 4-Stage full free lift

- Pre Cleaner
- Seat
 - Grammer
 - (Arm rest, Buckle sw, Seat belt interlock)
- OPSS(Travel, Travel+Mast)
- Load Weight Indicator