

**Robex**

# **300LC-9A**

With Tier 4 Interim Engine installed

**HYUNDAI HEAVY INDUSTRIES**

MOVING YOU FURTHER



**HYUNDAI**  
CONSTRUCTION EQUIPMENT AMERICAS, INC.

\*Photo may include optional equipment.

# PRIDE AT WORK

Hyundai Heavy Industries strives to build state-of-the art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality.

***Take pride in your work with Hyundai!***



\*Photo may include optional equipment.

# **Robex 300LC-9A**

## **Machine Walk-Around**



### **Engine Technology**

Proven, reliable, fuel efficient, low emission and low noise  
Cummins Tier 4 interim & EU stage III B engine

### **Hydraulic System Improvements**

New patented hydraulic control for improved controllability / Improved control valve design for added efficiency and smoother operation / New auto boom and swing priority system for optimum speed / New auto power boost feature for additional power when needed / Improved arm-in and boom-down flow regeneration system for added speed and efficiency

### **Pump Compartment**

Industry-leading, powerful, reliable Kawasaki designed, variable volume in-line axial piston pumps  
New compact solenoid block equipped with 4 solenoid valves, 1 EPPR valve, 1 check valve accumulator and pilot filter - controls 2 speed travel, power boost, boom priority, safety lock, arm regeneration

### **Enhanced Operator Cab**

#### **Improved Visibility**

Enlarged cab with improved visibility / See-through upper skylight for visibility and ventilation  
Larger right-side glass, now one piece, for better right visibility  
Safety glass windows on all sides - less expensive than (polycarbonate) and won't scratch or fade  
Closeable sunshade for operator convenience / Reduced front window seam for improved operator view

#### **Improved Cab Construction**

New steel tube construction for added operator safety, protection and durability  
New window open/close mechanism designed with cable and spring lift assist and single latch release

#### **Improved Suspension Seat / Console Assembly**

Ergonomic joysticks with auxiliary control buttons for attachment use with new sleek styling  
Heated suspension (standard) or optional air ride suspension with heat  
New joystick consoles - now adjustable in height by pushing a button  
Integrated seat with consoles - reduces the operator fatigue

#### **Advanced 7" Color Cluster with Touch Screen**

New Color LCD Display with easy to read digital gauges for hydraulic oil temperature, water temperature, and fuel. Simplified design makes adjustment and diagnostics easier. Also, new enhanced features such as rear-view camera are integrated into monitor.

3 power modes : (P) Power, (S) Standard, (E) Economy, 2 work modes : Dig & Attachment, (U) User mode for operator preference

Enhanced self-diagnostic features with GPS download capability

One pump flow or two pump flow for optional attachment is now selectable through the cluster  
New anti-theft system with password capability

Boom speed and arm regeneration are selectable through the monitor.

Auto power boost is now available - selectable (on/off) through the monitor.

Powerful air conditioning and heating with automatic climate control

RMS (Remote Management System) works through GPS/satellite technology to ultimately provide better customer service and support.

### **Undercarriage**

Sealed track chain (urethane seals) / Standard track rail guard / Comfortable bolt-on steps  
Large upper roller cut-outs for debris clean-out / Tapered side frames for debris clean-out / Grease-type track tensioner

# PRECISION

Innovative hydraulic system technologies make the 9A series excavator fast, smooth and easy to control.



\*Photo may include optional equipment.

# Computer Aided Power

The engine horsepower and hydraulic horsepower together in unison through the advanced CAPO (Computer Aided Power Optimization) system flow for the job at hand. Operator can set their own preferences for boom or swing priority, power mode selection and optional work tools at the touch of a button.

The CAPO system also provides complete self-diagnostic features and digital gauges for important information like hydraulic oil temperature, water temperatures and fuel level. This system interfaces with multiple sensors placed throughout the hydraulic system as well as the electronically controlled engine to provide the optimum level of engine power and hydraulic flow.

## Power Mode

P (Power Max) mode maximizes machine speed and power for mass production.

S (Standard) mode provides a reduced, fixed rpm for optimum performance and improved fuel economy. For maximum fuel savings and improved control, E (Economy) mode provides precise flow and engine power based on load demand. Three unique power modes provide the operator with custom power, speed and fuel economy.

## Work Mode

The work mode allows the operator to select single flow attachments like a hydraulic breaker or bi-directional flow attachments like a crusher. Flow settings unique to each attachment can be programmed from within the cluster.

## User Mode

Some jobs require more precise machine settings. Using the versatile U (User) mode, the operator can customize engine speed, pump output, idle speed and other machine settings for the job at hand.

# Improved Hydraulic System



To achieve optimum precision, Hyundai redesigned the hydraulic system to provide the operator with super fine touch and improved controllability. Improved pump flow control reduces flow when controls are not being used to minimize fuel consumption.

Improved spool valves in the control valve are engineered to provide more precise flow to each function with less effort.

Improved hydraulic valves, precision-designed variable volume piston pumps, fine-touch pilot controls, and enhanced travel functions make any

operator running a 9A series look like a smooth operator. Newly improved features include arm-in and boom-down flow regeneration, improved control valve technology and innovative auto boom and swing priority for optimal performance in any application.



## Auto Boom-swing Priority

This smart function automatically and continuously looks the ideal hydraulic flow balance for the boom and swing motions of the machine. The advanced CAPO system monitors the hydraulic system and adjusts its settings to maximize performance and productivity.


# PERFORMANCE

9A series is designed for maximum performance to keep the operator working productively.



## Track Rail Guard & Adjusters

Durable track rail guards keep track links in place. Track adjustment is made easy with standard grease cylinder track adjusters and shock absorbing springs.

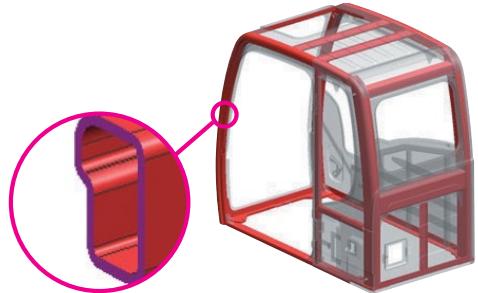


## Structure Strength

The 9A series cabin structure has been fitted with stronger but slimmer tubing for more safety and improved visibility. Low-stress, high strength steel is integrally welded to form a stronger, more durable upper and lower frame. Structural integrity was tested by way of FEM (Finite Elements Method) analysis and long-term durability tests. The optional ROPS (Roll Over Protective Structure) cab can be equipped to enhance operator safety.

## Cummins QSB6.7 Engine

QSB6.7 engine above 174 hp (130 kW) meet Tier 4 Interim/Stage III B emissions regulation with the combination of a proven cooled-EGR system, High Pressure Common Rail (HPCR) fuel system, Cummins Diesel Oxidation Catalyst and Particulate Filter. The QSB6.7 is also complemented by patented VGT™ Turbocharger, which continuously varies the airflow boost to precisely match engine rpm and load demands for optimal performance. This engine features the Cummins Direct Flow™ air filter, which has a smaller profile than radial filters. The result is an engine that fits into existing equipment, delivers better performance with faster cycle times and better fuel economy than the previous model.

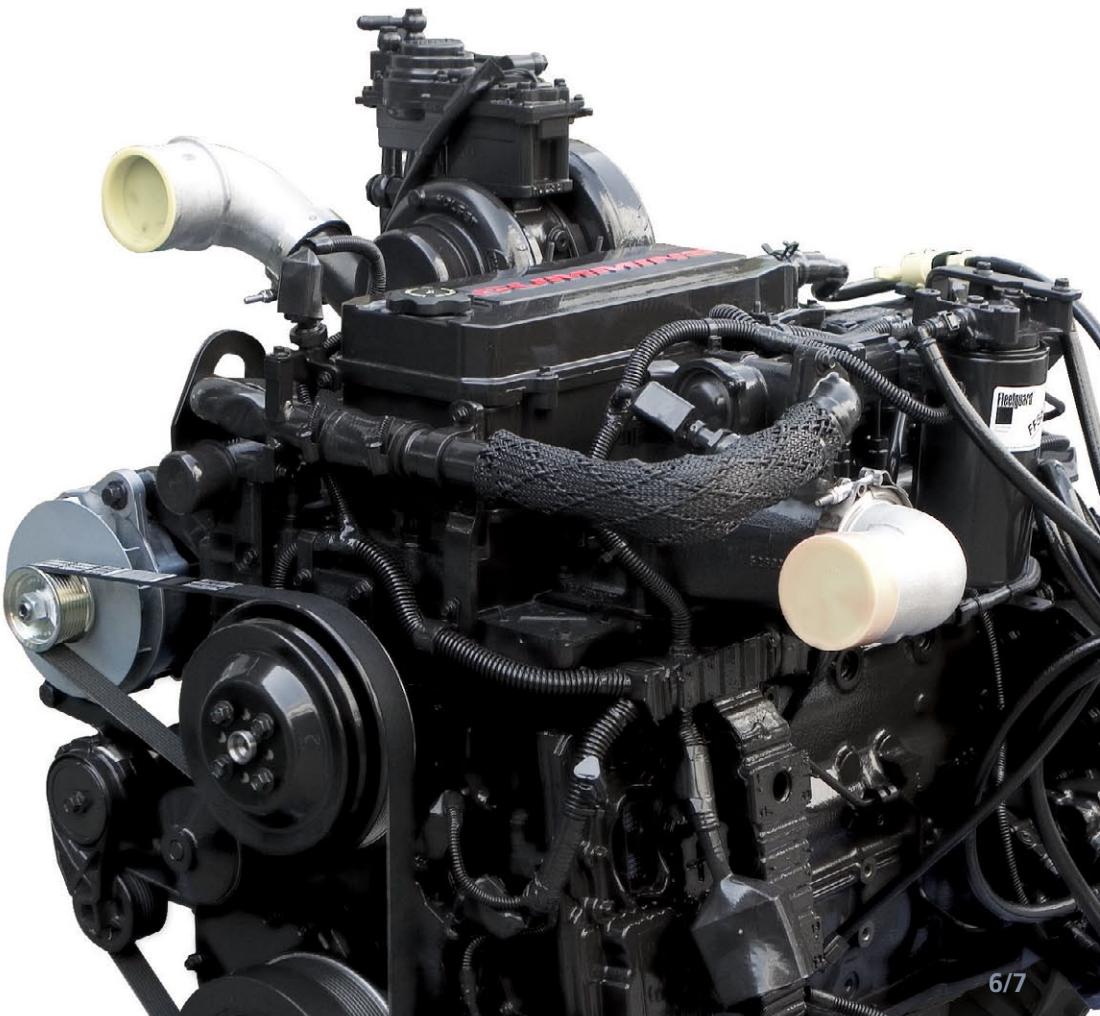

# PREFERENCE

Operating a 9A series is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.



\*Photo may include optional equipment.

## Wide Cabin with Excellent Visibility

The newly designed cabin has more space, a wider field of view and operator comfort. Special attention was given to a clear, open and convenient interior with plenty of visibility of the machine surroundings and the job at hand. This well-balanced combination of comfort and visibility puts the operator in the perfect position to work safely and securely.



In 9A series cabin you can easily adjust the seat, console and armrest settings to best suit your comfort level. The seat is integrated with console and absorbs console vibration with the seat suspension to reduce operator's fatigue. New joystick consoles are adjustable in height by pushing a button. Other preference settings that add to overall operator comfort include the fully automatic high capacity airconditioning system, transparent polycarbonate glass sun roof, large and easy to control sun visor, and the radio / USB player.

## Operator Comfort



## Reduced Stress

Work is stressful enough. Your work environment should be stress free. Hyundai's 9A series provides improved cab amenities, additional space and a comfortable seat to minimize stress to the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with USB player, AM/FM stereo and MP3 capabilities, plus remotely located controls, is perfect for listening to your favorite music .

Operators can talk on the phone with the hands-free cell phone feature. Also, the newly designed optional remote control offers mobile hands-free bluetooth and hands-free radio cable function.



## Smart Key System (Option)

9A series excavators provide smart key system as an option. This allows the operator to start the engine by the push of a starter button without inserting a key in the ignition.

## Operator - Friendly Cluster

The advanced new cluster with 7-inch wide color LCD touch screen and toggle switches allows the operator to select his personal machine preferences. Power and work mode selection, self diagnostics, optional rear-view camera, maintenance check lists, start-up machine security, and video functions were integrated into the cluster to make the machine more versatile and the operator more productive.

The newly applied FM transmitter application transmits signal to USB & radio player with the same frequency as the cluster. The player outputs the audio through the internal speaker in the cab. An adjustable cluster hinge bracket improves cluster visibility, and video & firmware updates are easy with the USB host support.



### Monitor Tilt Range



**Horizontal**  
Total : 15°



**Vertical**  
Total : 30°




# PROFITABILITY

9A series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.



## Fuel Efficiency

9A series excavators are engineered to be extremely fuel efficient. New innovations like the variable speed fan clutch, two-stage auto decel system and the new economy mode help to conserve fuel and reduce the impact on the environment.

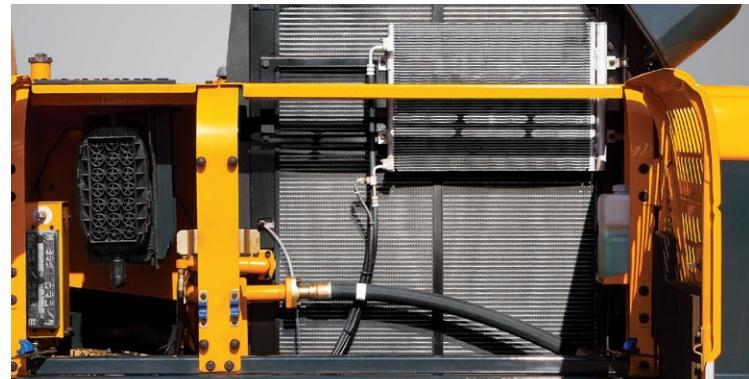

## Hi-mate (Remote Management System)

Hi-mate, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi-mate saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.



## Easy Access

Ground-line access to filters, lube fittings, fuses, machine computer components and wide open compartments makes service more convenient on the 9A series.



## Long-Life Components

9A series excavators were designed with bushings with long-life lube intervals (250 hrs), polymer shims (wear resistant, noise reducing), long-life hydraulic filters (1,000hrs), long-life hydraulic oil (5,000hrs), more efficient cooling systems and integrated preheating systems which extend service intervals, minimize operating costs and reduce machine down time.

# Specifications

## ENGINE

MODEL		Cummins QSB6.7	
Type		Water-cooled, 4-cycle Diesel, 6-cylinder in-line, Direct injection, Turbocharged, Charge air cooled, Cooled EGR Low emission	
Rated flywheel horse power	SAE	J1995 (gross)	225 HP (168 kW)/ 1,900 rpm
		J1349 (net)	212 HP (158 kW)/ 1,900 rpm
	DIN	6271/1 (gross)	228 PS (168 kW)/ 1,900 rpm
		6271/1 (net)	215 PS (158 kW)/ 1,900 rpm
Max. torque		96.8 kgf-m (700 lbf-ft)/ 1,400 rpm	
Bore X stroke		107 x 124 mm (4.1" x 4.88")	
Piston displacement		6,700 cc (408 in <sup>3</sup> )	
Batteries		2 x 12 V x 160 AH	
Starting motor		24 V, 4.8kW	
Alternator		24 V, 95 Amp	

## HYDRAULIC SYSTEM

### MAIN PUMP

Type	Variable displacement tandem-axis piston pumps
Max. flow	2 X 266 L/min (70.3 US gpm / 58.5 UK gpm)
Sub-pump for pilot circuit	Gear pump

Cross-sensing and fuel saving pump system

### HYDRAULIC MOTORS

Travel	Two-speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

### RELIEF VALVE SETTING

Implement circuits	350 kgf/cm <sup>2</sup> (4,978 psi)
Travel	350 kgf/cm <sup>2</sup> (4,978 psi)
Power boost (boom, arm, bucket)	380 kgf/cm <sup>2</sup> (5,404 psi)
Swing circuit	300 kgf/cm <sup>2</sup> (4,267 psi)
Pilot circuit	40 kgf/cm <sup>2</sup> (568 psi)
Service valve	Installed

### HYDRAULIC CYLINDERS

No. of cylinder bore X stroke	Boom: 2-140 X 1,465 mm (5.5" X 57.7") Arm: 1-150 X 1,765 mm (5.9" X 69.5") Bucket: 1-135 X 1,185 mm (5.3" X 46.7")
----------------------------------	--

## DRIVES & BRAKES

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor, in-shoe design
Reduction system	Planetary reduction gear
Max. drawbar pull	27,300 kgf (60,200 lbf)
Max. travel speed (high / low)	5.4 km/hr (3.4 mph) / 3.2 km/hr (2.0 mph)
Gradeability	35° (70 %)
Parking brake	Multi wet disc

## CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)
Traveling and steering	Two levers with pedals
Engine throttle	Electric, Dial type

## SWING SYSTEM

Swing motor	Fixed displacement axial pistons motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	11 rpm

## COOLANT & LUBRICANT CAPACITY

Re-filling	liter	US gal	UK gal
Fuel tank	500	132.1	110.0
Engine coolant	40	10.6	8.8
Engine oil	24	6.3	5.3
Swing device	6	1.6	1.3
Final drive (each)	8	2.1	1.8
Hydraulic system (including tank)	330	87.2	72.6
Hydraulic tank	190	50.2	41.8

## UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

Center frame	X - leg type
Track frame	Pentagonal box type
No. of shoes on each side	48
No. of carrier rollers on each side	2
No. of track rollers on each side	9
No. of rail guards on each side	2

## OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 6,250mm (20' 6") boom, 3,050mm (10' 0") arm, SAE heaped 1.27m<sup>3</sup> (1.66 yd<sup>3</sup>) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

MAJOR COMPONENT WEIGHT		
Upperstructure	7,040 kg (15,520 lb)	
Boom (with arm cylinder)	2,670 kg (5,890 lb)	
Arm (with bucket cylinder)	1,570 kg (3,460 lb)	

## OPERATING WEIGHT

Shoes	Operating weight	
	kg (lb)	kgf/cm <sup>2</sup> (psi)
Triple grouser	R300LC-9A	29,800 (65,700)
	600 mm (24")	0.57 (8.11)
	R300NLC-9A	29,600 (65,260)
	R300LC-9A H/W	32,640 (71,960)
	R300LC-9A-9A	30,380 (66,980)
	700 mm (28")	0.62 (8.82)
800 mm (32")	R300LC-9A H/W	33,220 (73,240)
	R300LC-9A	30,960 (68,260)
	R300LC-9A H/W	33,800 (74,520)
	900 mm (36")	0.55 (7.82)
	R300LC-9A	31,540 (69,530)
Double grouser	700 mm (28")	0.45 (6.40)
	R300LC-9A H/W	33,900 (74,740)
		0.49 (6.97)
		0.40 (5.69)

## BUCKETS

All buckets are welded with high-strength steel.



SAE heaped m <sup>3</sup> (yd <sup>3</sup> )	0.79 (1.03)	1.03 (1.35)	1.27 (1.66) 1.38 (1.8) 1.50 (1.96)	1.73 (2.26) 1.85 (2.42)	□ 1.27 (1.66)	◊ 1.07 (1.40) ◊ 1.15 (1.50)	◊ 1.27 (1.66) ◊ 1.46 (1.91)	● 1.16 (1.52) ● 1.49 (1.95)	★ 0.52 (0.68)
--	-------------	-------------	--	----------------------------	---------------	--------------------------------	--------------------------------	--------------------------------	---------------

SAE heaped	CECE heaped	Capacity m <sup>3</sup> (yd <sup>3</sup> )		Weight kg (lb)	Recommendation mm (ft-in)					
		Width mm (in)			6,250 (20' 6") Boom				10,200 (33' 6") Boom	
		Without side cutters	With side cutters		2,100 (6' 11") Arm	2,500 (8' 2") Arm	3,050 (10' 0") Arm	3,750 (12' 4") Arm	7,850 (25' 9") Arm	
0.79 (1.03)	0.70 (0.92)	890 (35.0)	1,010 (39.8)	790 (1,740)	●	●	●	●	-	
1.03 (1.35)	0.90 (1.18)	1,090 (42.9)	1,210 (47.6)	890 (1,960)	●	●	●	●	-	
1.27 (1.66)	1.10 (1.44)	1,290 (50.8)	1,410 (55.5)	1,010 (2,230)	●	●	●	■	-	
1.38 (1.8)	1.20 (1.57)	1,400 (55.1)	1,520 (59.8)	1,060 (2,340)	●	●	■	▲	-	
1.50 (1.96)	1.30 (1.70)	1,490 (58.7)	1,610 (63.4)	1,080 (2,380)	●	●	■	▲	-	
1.73 (2.26)	1.50 (1.96)	1,700 (66.9)	1,820 (71.7)	1,170 (2,580)	■	■	▲	▲	-	
1.85 (2.42)	1.60 (2.09)	1,800 (70.9)	1,920 (75.6)	1,230 (2,710)	■	▲	▲	▲	-	
□ 1.27 (1.66)	1.10 (1.44)	1,310 (51.6)	1,340 (52.8)	1,300 (2,870)	●	●	■	■	-	
◊ 1.07 (1.40)	0.95 (1.24)	1,150 (45.3)	-	1,120 (2,470)	●	●	●	●	-	
◊ 1.15 (1.50)	1.00 (1.31)	1,210 (47.6)	-	1,160 (2,560)	●	●	●	■	-	
◊ 1.27 (1.66)	1.10 (1.44)	1,310 (51.6)	-	1,240 (2,730)	●	●	■	■	-	
◊ 1.46 (1.91)	1.28 (1.67)	1,460 (57.5)	-	1,320 (2,910)	■	■	■	▲	-	
● 1.16 (1.52)	1.00 (1.31)	1,340 (52.8)	-	1,280 (2,820)	●	●	●	■	-	
● 1.49 (1.95)	1.28 (1.67)	1,620 (63.8)	-	1,440 (3,170)	■	■	▲	▲	-	
★ 0.52 (0.68)	0.45 (0.59)	935 (36.8)	1,035 (40.7)	460 (1,010)	-	-	-	-	■	

□ Casting bucket

○ Rock-Heavy duty bucket

● : Applicable for materials with density of 2,000 kg /m<sup>3</sup> (3,370 lb/ yd<sup>3</sup>) or less

◊ Heavy duty bucket

★ Long reach bucket

■ : Applicable for materials with density of 1,600 kg /m<sup>3</sup> (2,700 lb/ yd<sup>3</sup>) or less

▲ : Applicable for materials with density of 1,100 kg /m<sup>3</sup> (1,850 lb/ yd<sup>3</sup>) or less

## ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design. 6.25m, 10.20m Booms and 2.1m, 2.5m, 3.05m, 3.75m & 7.85m Arms are available.

## DIGGING FORCE


Boom	Length	mm (ft-in)	6,250 (20' 6")				10,200 (33' 6")	Remark
	Weight	kg (lb)	2,670 (5,900)					
Arm	Length	mm (ft-in)	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")	7,850 (25' 9")
	Weight	kg (lb)	1,480 (3,260)	1,460 (3,220)	1,570 (3,460)	1,710 (3,770)		
Bucket digging force	SAE	kN	168.7 [183.1]	168.7 [183.1]	168.7 [183.1]	168.7 [183.1]	70	[ ]: Power Boost
		kgf	17200 [18670]	17200 [18670]	17200 [18670]	17200 [18670]	7100	
		lbf	37920 [41170]	37920 [41170]	37920 [41170]	37920 [41170]	15650	
	ISO	kN	192.2 [208.7]	192.2 [208.7]	192.2 [208.7]	192.2 [208.7]	80	
		kgf	19600 [21280]	19600 [21280]	19600 [21280]	19600 [21280]	8200	
		lbf	43210 [46910]	43210 [46910]	43210 [46910]	43210 [46910]	18080	
Arm crowd force	SAE	kN	180.4 [195.9]	156.9 [170.4]	131.4 [142.7]	114.7 [124.6]	47.1	[ ]: Power Boost
		kgf	18400 [19980]	16000 [17370]	13400 [14550]	11700 [12700]	4800	
		lbf	40570 [44050]	35270 [38290]	29540 [32070]	25790 [28000]	10580	
	ISO	kN	190.3 [206.6]	163.8 [177.8]	136.3 [148]	119.6 [129.9]	48.1	
		kgf	19400 [21060]	16700 [18130]	13900 [15090]	12200 [13250]	4900	
		lbf	42770 [46440]	36820 [39980]	30640 [33270]	26900 [29210]	10800	

Note: Boom weight includes arm cylinder, piping, and pin

Arm weight includes bucket cylinder, linkage, and pin

# Dimensions & Working Range

## R300LC-9A DIMENSIONS

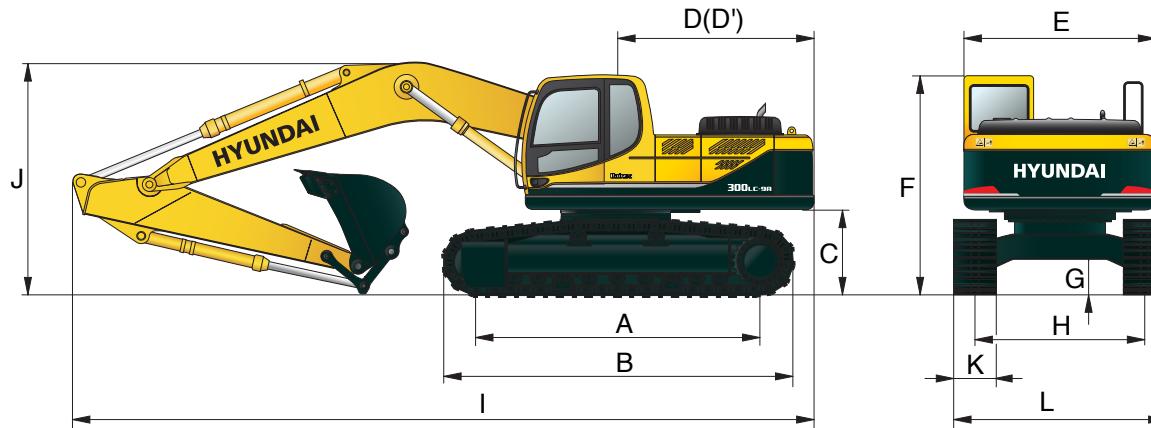


Unit : mm (ft · in)

A Tumbler distance	4,030 (13' 3")
B Overall length of crawler	4,940 (16' 2")
C Ground clearance of counterweight	1,190 (3' 11")
D Tail swing radius	3,200 (10' 6")
D' Rear-end length	3,120 (10' 3")
E Overall width of upperstructure	2,980 (9' 9")
F Overall height of cab	3,010 (9' 11")
G Min. ground clearance	500 (1' 8")
H Track gauge	2,600 (8' 6")

Boom length	6,250 (20' 6")				10,200 (33' 6")
Arm length	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")
I Overall length	10,700 (35' 1")	10,650 (34' 11")	10,560 (34' 8")	10,630 (34' 11")	14,560 (47' 9")
J Overall height of boom	3,590 (11' 9")	3,470 (11' 5")	3,290 (10' 10")	3,500 (11' 6")	3,560 (11' 8")
K Track shoe width	600 (24")	700 (28")	800 (32")	900 (36")	
L Overall width	3,200 (10' 6")	3,300 (10' 10")	3,400 (11' 2")	3,500 (11' 16")	

## R300LC-9A WORKING RANGE


Unit : mm (ft · in)

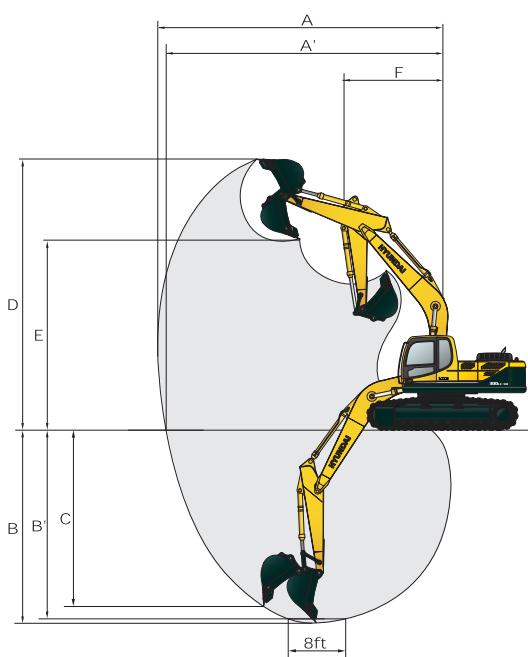

Boom length	6,250 (20' 6")				10,200 (33' 6")
Arm length	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")
A Max. digging reach	10,020 (32' 10")	10,280 (33' 9")	10,820 (35' 6")	11,400 (37' 5")	18,510 (60' 9")
A' Max. digging reach on ground	9,820 (32' 3")	10,080 (33' 1")	10,620 (34' 10")	11,220 (36' 10")	18,400 (60' 4")
B Max. digging depth	6,440 (21' 2")	6,840 (22' 5")	7,390 (24' 3")	8,090 (26' 7")	14,820 (48' 7")
B' Max. digging depth (8' level)	6,240 (20' 6")	6,630 (21' 9")	7,200 (23' 7")	7,920 (25' 12")	14,690 (48' 2")
C Max. vertical wall digging depth	6,000 (19' 8")	5,850 (19' 2")	6,380 (20' 11")	7,080 (23' 3")	12,020 (39' 5")
D Max. digging height	10,070 (33' 0")	10,110 (33' 2")	10,160 (33' 4")	10,360 (33' 12")	14,500 (47' 7")
E Max. dumping height	6,940 (22' 9")	7,030 (23' 1")	7,110 (23' 4")	7,310 (23' 12")	12,190 (39' 12")
F Min. swing radius	4,380 (14' 4")	4,260 (13' 12")	4,230 (13' 11")	4,190 (13' 9")	6,250 (20' 6")

# Dimensions & Working Range

## R300NLC-9A DIMENSIONS

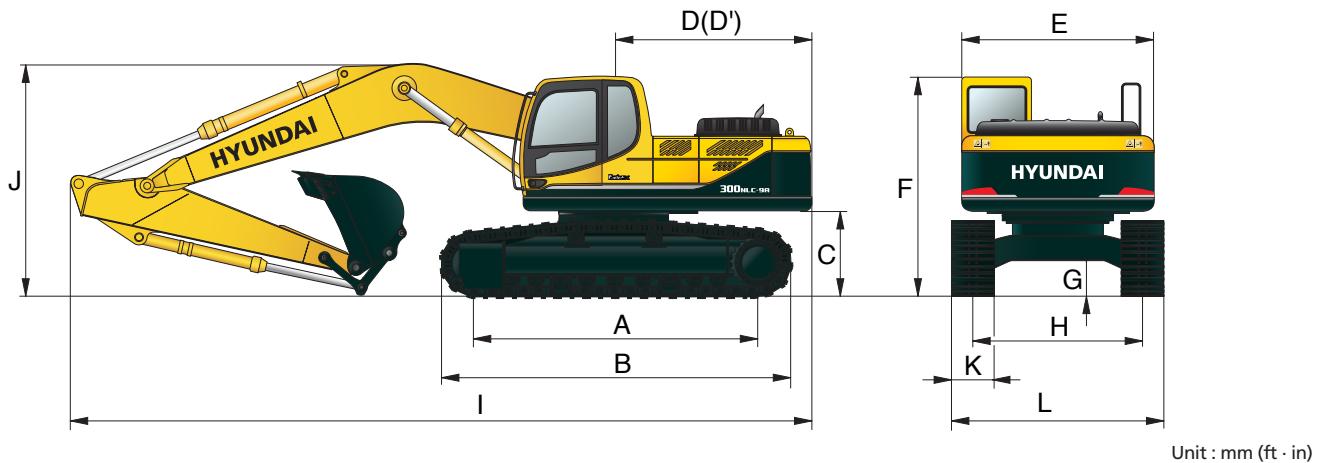


Unit : mm (ft · in)

A Tumbler distance	4,030 (13' 3")
B Overall length of crawler	4,940 (16' 2")
C Ground clearance of counterweight	1,190 (3' 11")
D Tail swing radius	3,200 (10' 6")
D' Rear-end length	3,120 (10' 3")
E Overall width of upperstructure	2,980 (9' 9")
F Overall height of cab	3,010 (9' 11")
G Min. ground clearance	500 (1' 8")
H Track gauge	2,390 (7' 10")

Boom length	6,250 (20' 6")			
Arm length	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
I Overall length	10,700 (35' 1")	10,650 (34' 11")	10,560 (34' 8")	10,630 (34' 11")
J Overall height of boom	3,590 (11' 9")	3,470 (11' 5")	3,290 (10' 10")	3,500 (11' 6")
K Track shoe width	600 (24")			
L Overall width	2,990 (9' 10")			

## R300NLC-9A WORKING RANGE


Unit : mm (ft · in)

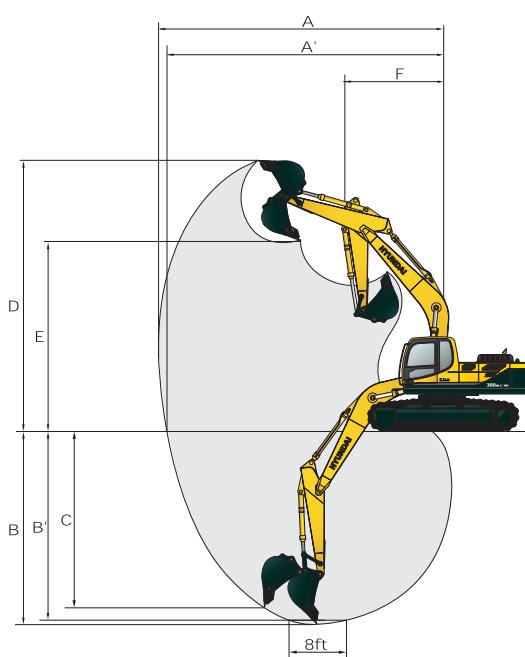

Boom length	6,250 (20' 6")			
Arm length	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
A Max. digging reach	10,020 (32' 10")	10,280 (33' 9")	10,820 (35' 6")	11,400 (37' 5")
A' Max. digging reach on ground	9,820 (32' 3")	10,080 (33' 1")	10,620 (34' 10")	11,220 (36' 10")
B Max. digging depth	6,440 (21' 2")	6,840 (22' 5")	7,390 (24' 3")	8,090 (26' 7")
B' Max. digging depth (8' level)	6,240 (20' 6")	6,630 (21' 9")	7,200 (23' 7")	7,920 (25' 12")
C Max. vertical wall digging depth	6,000 (19' 8")	5,850 (19' 2")	6,380 (20' 11")	7,080 (23' 3")
D Max. digging height	10,070 (33' 0")	10,110 (33' 2")	10,160 (33' 4")	10,360 (33' 12")
E Max. dumping height	6,940 (22' 9")	7,030 (23' 1")	7,110 (23' 4")	7,310 (23' 12")
F Min. swing radius	4,380 (14' 4")	4,260 (13' 12")	4,230 (13' 11")	4,190 (13' 9")

# Dimensions & Working Range

## R300LC-9A HIGH WALKER DIMENSIONS

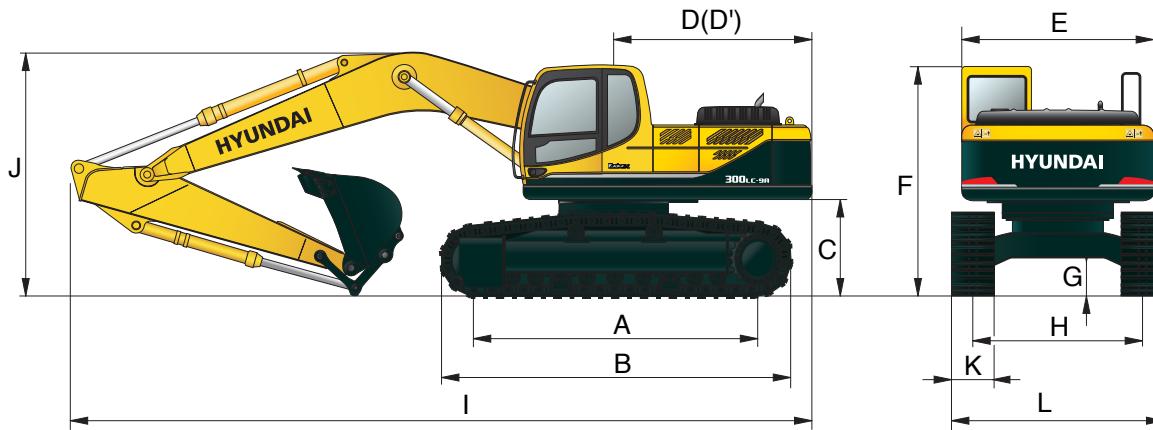


Unit : mm (ft · in)

A Tumbler distance	4,030 (13' 3")
B Overall length of crawler	4,950 (16' 3")
C Ground clearance of counterweight	1,500 (4' 11")
D Tail swing radius	3,200 (10' 6")
D' Rear-end length	3,120 (10' 3")
E Overall width of upperstructure	2,980 (9' 9")
F Overall height of cab	3,380 (11' 1")
G Min. ground clearance	765 (2' 6")
H Track gauge	2,870 (9' 5")

Boom length	6,250 (20' 6")			
	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
I Overall length	10,690 (35' 1")	10,610 (34' 10")	10,430 (34' 3")	10,530 (34' 7")
J Overall height of boom	3,740 (12' 3")	3,590 (11' 9")	3,350 (10' 12")	3,510 (11' 6")
K Track shoe width	Type	Triple grouser		Double grouser
	Width	600 (24")	700 (28")	800 (32")
L Overall width		3,470 (11' 5")	3,570 (11' 9")	3,670 (12' 0")
				3,570 (11' 9")

## R300LC-9A HIGH WALKER WORKING RANGE

Unit : mm (ft · in)

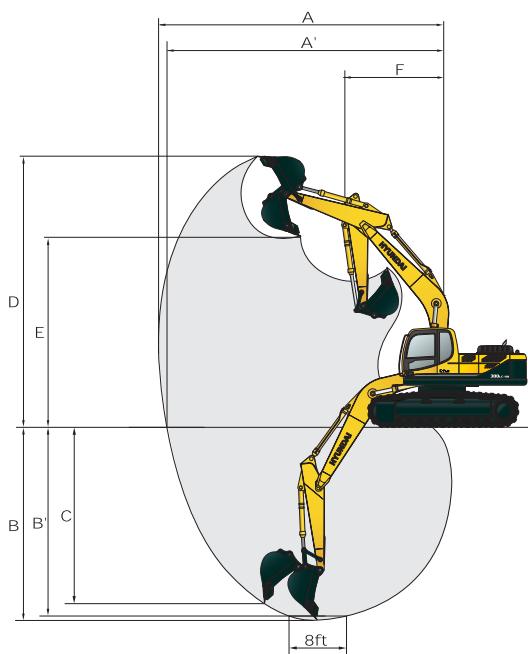

Boom length	6,250 (20' 6")			
	2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
A Max. digging reach	10,020 (32' 10")	10,280 (33' 9")	10,790 (35' 5")	11,400 (37' 5")
A' Max. digging reach on ground	9,750 (31' 12")	10,020 (32' 10")	10,530 (34' 7")	11,160 (36' 7")
B Max. digging depth	6,140 (20' 2")	6,540 (21' 5")	7,090 (23' 3")	7,790 (25' 7")
B' Max. digging depth (8' level)	5,930 (19' 5")	6,330 (20' 9")	6,910 (22' 8")	7,630 (25' 0")
C Max. vertical wall digging depth	5,700 (18' 8")	5,560 (18' 3")	6,090 (19' 12")	6,790 (22' 3")
D Max. digging height	10,370 (34' 0")	10,220 (33' 6")	10,440 (34' 3")	10,660 (34' 12")
E Max. dumping height	7,240 (23' 9")	7,170 (23' 6")	7,400 (24' 3")	7,610 (24' 12")
F Min. swing radius	4,380 (14' 4")	4,260 (13' 12")	4,230 (13' 11")	4,190 (13' 9")

# Lifting Capacity

R300LC-9A

 Rating over-front  Rating over-side or 360 degree

Boom : 6.25m (20' 6") / Arm : 2.10 m (6' 11") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)	kg lb	Load radius								At max. reach			
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach	
												m (ft)	
7.5 m (25 ft)	kg lb					*6200	*6200			*5710	4550	8.01	
6.0 m (20 ft)	kg lb					*13670	*13670			*12590	10030	(26.3)	
4.5 m (15 ft)	kg lb			*9620	*9620	*7590	7040	*6700	4800	5250	3170	9.42	
3.0 m (10 ft)	kg lb			*21210	*21210	*16730	15520	*14770	10580	11570	6990	(30.9)	
1.5 m (5 ft)	kg lb			*12550	10150	*8910	6570	*7330	4580	4960	2960	9.64	
Ground Line	kg lb			*27670	22380	*19640	14480	*16160	10100	10930	6530	(31.6)	
-1.5 m (-5 ft)	kg lb	*14540	9450	*10090	6170	7300	4370	4950	2930	5940	3560	8.57	
-3.0 m (-10 ft)	kg lb	*32060	20830	*22240	13600	16090	9630	10910	6460	13100	7850	(28.1)	
-4.5 m (-15 ft)	kg lb	*31420	*31420	*32650	20410	22350	12960	15700	9280		*6670	4570	7.47
-1.5 m (-5 ft)	kg lb	*18890	*18890	*13670	9440	*10170	5980			*14700	10080	(24.5)	
-4.5 m (-15 ft)	kg lb	*41650	*41650	*30140	20810	*22420	13180						
-1.5 m (-5 ft)	kg lb	*15250	*15250	*11130	9840								
-4.5 m (-15 ft)	kg lb	*33620	*33620	*24540	21690								

Boom : 6.25m (20' 6") / Arm : 2.50 m (8' 2") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)	kg lb	Load radius								At max. reach				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach
														m (ft)
7.5 m (25 ft)	kg lb					*8760	*8760	*7090	*6310	4840	5010	3020	9.69	
6.0 m (20 ft)	kg lb			*19310	*19310	*15630	*15630	*13910	10670	11050	6660	31.8		
4.5 m (15 ft)	kg lb			*11680	10360	*8460	6630	*7000	4600	4730	2810	9.90		
3.0 m (10 ft)	kg lb			*25750	22840	*18650	14620	*15430	10140	10430	6190	(32.5)		
1.5 m (5 ft)	kg lb			*13960	9530	*9730	6190	7300	4370	4710	2770	9.84		
Ground Line	kg lb			*30780	21010	*21450	13650	16090	9630	10380	6110	(32.3)		
-1.5 m (-5 ft)	kg lb	*15220	*15220	*14910	9140	10060	5810	7040	4130	5550	3290	8.87		
-3.0 m (-10 ft)	kg lb	*33550	*33550	*32870	20150	22180	12810	15520	9110	12240	7250	(29.1)		
-4.5 m (-15 ft)	kg lb	*17240	*17240	*20000	19540	*14040	9270	10130	5860		*6780	4140	7.82	
-1.5 m (-5 ft)	kg lb	*38010	*38010	*44090	43080	*30950	20440	22330	12920		*14950	9130	(25.7)	
-4.5 m (-15 ft)	kg lb			*16720	*16720	*11970	9610							
-1.5 m (-5 ft)	kg lb			*36860	*36860	*26390	21190							

Boom : 6.25m (20' 6") / Arm : 3.05 m (10' 0") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)	kg lb	Load radius								At max. reach					
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity		Reach	
														m (ft)	
7.5 m (25 ft)	kg lb											*4780	3780	8.94	
6.0 m (20 ft)	kg lb											*10540	8330	(29.3)	
4.5 m (15 ft)	kg lb											*4940	3100	9.74	
3.0 m (10 ft)	kg lb	*10490	*10490	*10510	*10510	*7800	6710	*6530	4620	*4420	3310	4330	2540	10.40	
1.5 m (5 ft)	kg lb	*23130	*23130	*23170	*23170	*17200	14790	*14400	10190	*9740	7300	9550	5600	(34.1)	
Ground Line	kg lb			*13100	9660	*9190	6220	7300	4350	*5230	3170	4300	2490	10.35	
-1.5 m (-5 ft)	kg lb			*28880	21300	*20260	13710	16090	9590	*11530	6990	9480	5490	(34.0)	
-3.0 m (-10 ft)	kg lb			*10140	*10140	*14530	9160	10150	5880	7070	4150	*4600	3070		
-4.5 m (-15 ft)	kg lb			*22350	*22350	*32030	20190	22380	12960	15590	9150	*10140	6770	9880	
-1.5 m (-5 ft)	kg lb	*10990	*10990	*14250	*14250	*14890	9010	9970	5710	6950	4040		4950	2900	9.44
-3.0 m (-10 ft)	kg lb	*24230	*24230	*31420	*31420	*32830	19860	21980	12590	15320	8910		10910	6390	(31.0)
-4.5 m (-15 ft)	kg lb	*14880	*14880	*19250	19100	*14380	9070	9960	5710	6970	4060		5960	3540	8.48
-1.5 m (-5 ft)	kg lb	*32800	*32800	*42440	42110	*31700	20000	21960	12590	15370	8950		13140	7800	(27.8)
-4.5 m (-15 ft)	kg lb	*19470	*19470	*18400	*18400	*12820	9320	*9370	5890			*6400	5050	6.97	
-1.5 m (-5 ft)	kg lb	*42920	*42920	*40570	*40570	*28260	20550	*20660	12990			*14110	11130	(22.9)	

1. Lifting capacity is based on SAE J1097, ISO 10567.

2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (\*) indicates the load limited by hydraulic capacity.

# Lifting Capacity

## R300LC-9A

Rating over-front Rating over-side or 360 degree

Boom : 6.25m (20' 6") / Arm : 3.75 m (12' 4") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)	kg lb	Load radius								At max. reach						
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity	Reach	
														m (ft)		
7.5 m (25 ft)	kg lb													*4230	3250	9.67
6.0 m (20 ft)	kg lb													*9330	7170	(31.7)
4.5 m (15 ft)	kg lb													*5050	4990	10.40
3.0 m (10 ft)	kg lb													*11130	11000	10.83
1.5 m (5 ft)	kg lb													*14430	*14430	11.02
Ground	kg													*31810	*31810	11.02
Line	lb													*10550	*10550	10.97
-1.5 m (-5 ft)	kg lb													*23260	*23260	10.97
-3.0 m (-10 ft)	kg lb													*13010	*13010	9.25
-4.5 m (-15 ft)	kg lb													*16680	*16680	(30.3)
														*36770	*36770	(26.0)
														*14430	*14430	11.02
														*31810	*31810	11.02
														*10550	*10550	10.97
														*23260	*23260	10.97
														*13010	*13010	9.25
														*16680	*16680	(30.3)
														*36770	*36770	(26.0)

## R300NLC-9A

Rating over-front Rating over-side or 360 degree

Boom : 6.25m (20' 6") / Arm : 2.10 m (6' 11") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)	kg lb	Load radius								At max. reach						
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach					
														m (ft)		
7.5 m (25 ft)	kg lb													*6200	*6200	8.01
6.0 m (20 ft)	kg lb													*13670	*13670	(26.3)
4.5 m (15 ft)	kg lb													*9620	*9620	9.42
3.0 m (10 ft)	kg lb													*21210	*21210	(30.9)
1.5 m (5 ft)	kg lb													*12550	9050	9.64
Ground	kg													*27670	19950	(31.6)
Line	lb													*14460	*14460	(31.4)
-1.5 m (-5 ft)	kg lb													*14540	8370	9.58
-3.0 m (-10 ft)	kg lb													*32060	18450	(28.1)
-4.5 m (-15 ft)	kg lb													*15120	8170	9.23
														*33330	18010	(30.3)
														*14250	*14250	8.57
														*31420	*31420	(28.1)
														*18890	17220	7.47
														*41650	37960	(24.5)
														*15250	*15250	(24.5)
														*33620	*33620	(24.5)
														*24540	19290	(24.5)

Boom : 6.25m (20' 6") / Arm : 2.50 m (8' 2") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)	kg lb	Load radius								At max. reach						
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach			
														m (ft)		
7.5 m (25 ft)	kg lb													*5240	3870	8.34
6.0 m (20 ft)	kg lb													*11550	8530	(27.4)
4.5 m (15 ft)	kg lb													*8760	*8760	9.69
3.0 m (10 ft)	kg lb													*19310	*19310	(31.8)
1.5 m (5 ft)	kg lb													*11680	9250	9.90
Ground	kg													*25750	20390	(32.5)
Line	lb													*13960	8440	9.84
-1.5 m (-5 ft)	kg lb													*30780	18610	(32.3)
-3.0 m (-10 ft)	kg lb													*14930	8120	9.51
-4.5 m (-15 ft)	kg lb													*32910	17900	(29.1)
														*15220	*15220	8.87
														*33550	*33550	(29.1)
														*17240	*17240	7.82
														*20000	16870	(25.7)
														*44090	37190	(25.7)
														*16720	*16720	8.530
														*36860	*36860	(25.7)
														*26390	18810	(25.7)

1. Lifting capacity is based on SAE J1097, ISO 10567.

2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (\*) indicates the load limited by hydraulic capacity.

## Lifting Capacity

R300NLC-9A

 Rating over-front  Rating over-side or 360 degree

Boom : 6.25m (20' 6") / Arm : 3.05 m (10' 0") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)		Load radius										At max. reach				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity	Reach	
														m (ft)		
7.5 m (25 ft)	kg lb													*4780 *10540	3400 7500 (29.3)	8.94
6.0 m (20 ft)	kg lb									*5270 *11620	4610 10160			*4940 *10890	2770 6110 (32.0)	9.74
4.5 m (15 ft)	kg lb							*6380 *14070	*6380 *14070	*5780 *12740	4410 9720			4550 10030	2420 5340 (33.5)	10.20
3.0 m (10 ft)	kg lb			*10490 *23130	*10490 *23130	*10510 *23170	9510 20970	*7800 *17200	6040 13320	*6530 *14400	4150 9150	*4420 *9740	2940 6480	4310 9500 4940 (34.1)	2240 2190 10.40 (34.1)	
1.5 m (5 ft)	kg lb					*13100 *28880	8570 18890	*9190 *20260	5560 12260	7260 16010	3880 8550	*5230 *11530	2810 6190	4270 9410 4830 (34.0)	2190 10.35	
Ground Line	kg lb			*10140 *22350	*10140 *22350	*14530 *32030	8090 17840	10100 22270	5220 11510	7030 15500	3680 8110	*4600 *10140	2710 5970	4450 9810 5050 (32.9)	2290 10.04	
-1.5 m (-5 ft)	kg lb	*10990 *24230	*10990 *24230	*14250 *31420	*14250 *31420	*14890 *32830	7940 17500	9910 21850	5060 11160	6910 15230	3580 7890			4920 10850	2560 5640 (31.0)	9.44
-3.0 m (-10 ft)	kg lb	*14880 *32800	*14880 *32800	*19250 *42440	*16450 *36270	*14380 *31700	8000 17640	9910 21850	5060 11160	6930 15280	3590 7910			5920 13050	3140 6920 (27.8)	8.48
-4.5 m (-15 ft)	kg lb	*19470 *42920	*19470 *42920	*18400 *40570	*16950 *37370	*12820 *28260	8240 18170	*9370 *20660	5240 11550					*6400 *14110	4520 9960 (22.9)	6.97

Boom : 6.25m (20' 6") / Arm : 3.75 m (12' 4") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load radius													At max. reach												
Load point height m(ft)	1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity	Reach											
													m (ft )												
7.5 m (25 ft)	kg lb												*4230	2920	9.67										
6.0 m (20 ft)	kg lb												*9330	6440	(31.7)										
4.5 m (15 ft)	kg lb												*4470	*4470	*2540	*2540	*4400	2410	10.40						
													*9850	*9850	*5600	*5600	*9700	5310	(34.1)						
3.0 m (10 ft)	kg lb												*5050	4500	*3970	3120	4080	2110	10.83						
													*11130	9920	*8750	6880	8990	4650	(35.5)						
1.5 m (5 ft)	kg lb												*10550	*10550	*11820	8870	*8410	5670	*6760	3910	5350	2800	3820	1910	10.97
													*23260	*23260	*26060	19550	*18540	12500	*14900	8620	11790	6170	8420	4210	(36.0)
Ground Line	kg lb	*6830 *15060	*6830 *15060	*10900 *24030	*10900 *24030	*13790 *30400	8190 18060	*9670 *21320	5260 11600	7020 15480	3670 8090	5190 11440	2660 5860	3960 8730	1970 4340	10.68 (35.0)									
-1.5 m (-5 ft)	kg lb	*9850 *21720	*9850 *21720	*13520 *29810	*13520 *29810	*14680 *32360	7880 17370	9870 21760	5010 11050	6850 15100	3510 7740	5100 11240	2580 5690	4310 9500	2170 4780	10.12 (33.2)									
-3.0 m (-10 ft)	kg lb	*13010 *28680	*13010 *28680	*17210 *37940	16070 35430	*14640 *32280	7830 17260	9780 21560	4940 10890	6790 14970	3460 7630		5040 11110	2600 5730	9.25 (30.3)										
-4.5 m (-15 ft)	kg lb	*16680 *36770	*16680 *36770	*20250 *44640	16460 36290	*13660 *30120	7980 17590	9880 21780	5020 11070				*6200 *13670	3520 7760	7.92 (26.0)										

# Lifting Capacity

## R300LC-9A HIGH WALKER



Rating over-front



Rating over-side or 360 degree

Boom : 6.25m (20' 6") / Arm : 3.05 m (10' 0") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)	Load radius										At max. reach				
	1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity	Reach	
													m (ft)		
7.5 m (25 ft)	kg lb								*3560	*3560		*4810	4650	9.12	
6.0 m (20 ft)	kg lb								*7850	*7850		*10600	10250	(29.9)	
4.5 m (15 ft)	kg lb								*5340	*5340		*4970	3950	9.85	
3.0 m (10 ft)	kg lb								*11770	*11770		*10960	8710	(32.3)	
1.5 m (5 ft)	kg lb								*6630	*6630	*5910	*3130	*3130	10.26	
Ground	kg								*14620	*14620	*13030	*6900	*6900	(33.7)	
Line	kg								*24380	*24380	*17790	*14730	13030	10.41	
-1.5 m (-5 ft)	kg lb								*11060	*11060	*8070	*8070	*6680	5910	3390
-3.0 m (-10 ft)	kg lb								*23990	*23990	*17790	*17790	*14730	13030	10.41
-4.5 m (-15 ft)	kg lb								*13460	12470	*9420	7980	*7460	5640	3380
									*16010	*16010	*29670	27490	*20770	17590	10.31
									*10880	*10880	*14670	12030	*10360	7670	3570
									*23450	*23450	*32340	26520	*22840	16910	3560
									*11690	*11690	*15110	*14860	11910	*10720	9.95
									*25770	*25770	*33310	*33310	*32760	26260	3950
									*15680	*15680	*20360	*20360	*14180	12010	3390
									*34570	*34570	*44890	*44890	*31260	26480	3390
									*20460	*20460	*17650	*17650	*12350	12330	3390
									*45110	*45110	*38910	*38910	*27230	27180	3390
									*19730	*19730	17170				9.12

Boom : 6.25m (20' 6") / Arm : 3.75 m (12' 4") / Bucket : 1.27 m<sup>3</sup> (1.66 yd<sup>3</sup>) SAE heaped / Shoe : 600mm (24") triple grouser

Load point height m(ft)	Load radius										At max. reach				
	1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity	Reach	
													m (ft)		
7.5 m (25 ft)	kg lb												*4260	4070	9.83
6.0 m (20 ft)	kg lb												*9390	8970	(32.3)
4.5 m (15 ft)	kg lb												*10050	*10050	10.50
3.0 m (10 ft)	kg lb												*5200	*5200	10.89
1.5 m (5 ft)	kg lb												*11460	*11460	3180
Ground	kg												*11300	*11300	3560
Line	kg												*22580	*22580	3390
-1.5 m (-5 ft)	kg lb												*10240	*10240	3010
-3.0 m (-10 ft)	kg lb												*30120	*30120	3010
-4.5 m (-15 ft)	kg lb												*13660	*13660	3010
													*7420	*7420	3010
													*16360	*16360	3010
													*22970	*22970	3010
													*10420	*10420	3010
													*38490	*38490	3010
													*19680	*19680	3010
													*17460	*17460	3010
													*13340	*13340	3010
													*43390	*43390	3010
													*29410	*29410	3010
													*26520	*26520	3010
													*21470	*21470	3010
													*16620	*16620	3010

1. Lifting capacity is based on SAE J1097, ISO 10567.

2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (\*) indicates the load limited by hydraulic capacity.

# Lifting Capacity

## R300LC-9A LONG REACH

 Rating over-front  Rating over-side or 360 degree

Boom : 10.2m (33' 6") / Arm : 7.85 m (25' 9") / Bucket : 0.52 m<sup>3</sup> (0.68 yd<sup>3</sup>) SAE heaped / Shoe : 800mm (32") triple grouser

Load point height m (ft)	Load radius								At max. reach																		
	6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		10.5 m (35 ft)		12.0 m (40 ft)		13.5 m (45 ft)		15.0 m (50 ft)		Capacity		Reach										
															m (ft)												
13.5 m (45 ft)	kg															*1820	*1820	14.13									
	lb															*4010	*4010	(46.4)									
12.0 m (40 ft)	kg															*1840	*1840	15.27									
	lb															*4060	*4060	(50.1)									
10.5 m (35 ft)	kg															*1100	*1100	1830	16.18								
	lb															*2430	*2430	4120	4030	(53.1)							
9.0 m (30 ft)	kg															*1560	*1560	*1920	1600	16.89							
	lb															*3440	*3440	*4230	3530	(55.4)							
7.5 m (25 ft)	kg															*1940	*1940	*1870	1440	17.44							
	lb															*4280	*4280	*4120	*4340	3170	(57.2)						
6.0 m (20 ft)	kg															*2090	*2090	*2060	2020	*2030	1310	17.83					
	lb															*4610	*4610	*4540	4450	*4480	2890	(58.5)					
4.5 m (15 ft)	kg															*2390	*2390	*2270	*2190	1930	*2090	1220	18.08				
	lb															*5270	*5270	*5000	*4830	4250	*4610	2690	(59.3)				
3.0 m (10 ft)	kg															*3320	*3320	*2940	*2940	*2670	*2480	2290	*2340	1830	2120	1150	18.20
	lb															*7320	*7320	*6480	*6480	*5890	*5890	5050	*5160	4030	4670	2540	(59.7)
1.5 m (5 ft)	kg	*6230	*6230	*4760	*4760	*3900	*3900	*3340	*3340	*2970	2670	*2700	2140	*2510	1730	2080	1110	18.19									
	lb	*13730	*13730	*10490	*10490	*8600	*8600	*7360	*7360	*6550	5890	*5950	4720	*5530	3810	4590	2450	(59.7)									
Ground	kg	*7390	6790	*5530	5040	*4440	3900	*3740	3090	*3260	2480	*2920	2010	*2670	1630	2070	1100	18.04									
Line	lb	*16290	14970	*12190	11110	*9790	8600	*8250	6810	*7190	5470	*6440	4430	*5890	3590	4560	2430	(59.2)									
-1.5 m (-5 ft)	kg	*8230	6220	*6170	4620	*4910	3590	*4090	2870	*3530	2320	*3120	1890	2770	1540	2100	1110	17.76									
	lb	*18140	13710	*13600	10190	*10820	7910	*9020	6330	*7780	5110	*6880	4170	6110	3400	4630	2450	(58.3)									
-3.0 m (-10 ft)	kg	*8770	5900	*6630	4340	*5290	3370	*4390	2690	*3760	2190	3190	1790	2700	1480	2170	1140	17.33									
	lb	*19330	13010	*14620	9570	*11660	7430	*9680	5930	*8290	4830	7030	3950	5950	3260	4780	2510	(56.9)									
-4.5 m (-15 ft)	kg	*9070	5750	*6930	4180	*5550	3230	4530	2580	3730	2100	3120	1730	2660	1440	2280	1220	16.75									
	lb	*20000	12680	*15280	9220	*12240	7120	9990	5690	8220	4630	6880	3810	5860	3170	5030	2690	(55.0)									
-6.0 m (-20 ft)	kg	*9150	5710	*7080	4120	5580	3160	4460	2510	3670	2050	3090	1700	2650	1430	2470	1330	15.99									
	lb	*20170	12590	*15610	9080	12300	6970	9830	5530	8090	4520	6810	3750	5840	3150	5450	2930	(52.5)									
-7.5 m (-25 ft)	kg	*9030	5770	*7060	4130	5570	3150	4450	2510	3670	2050	3110	1710				2740	1520	15.04								
	lb	*19910	12720	*15560	9110	12280	6940	9810	5530	8090	4520	6860	3770				6040	3350	(49.3)								
-9.0 m (-30 ft)	kg	*8690	5920	*6860	4220	*5590	3210	4500	2550	3730	2100						*3130	1800	13.83								
	lb	*19160	13050	*15120	9300	*12320	7080	9920	5620	8220	4630						*6900	3970	(45.4)								
-10.5 m (-35 ft)	kg	*8080	6150	*6430	4380	*5250	3340	*4340	2670	*3570	2230						*3290	2270	12.31								
	lb	*17810	13560	*14180	9660	*11570	7360	5890	*7870	4920							*7250	5000	(40.4)								
-12.0 m (-40 ft)	kg	*7090	6490	*5670	4630	*4580	3560																				
	lb	*15630	14310	*12500	10210	*10100	7850																				
-13.5 m (-45 ft)	kg	*5480	*5480	*4290	*4290																						
	lb	*12080	*12080	*9460	*9460																						

1. Lifting capacity is based on SAE J1097, ISO 10567.

2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook(standard equipment) located on the back of the bucket.

4. (\*) indicates the load limited by hydraulic capacity.

## STANDARD EQUIPMENT

### ISO Standard cabin

All-weather steel cab with 360° visibility  
Safety glass windows  
Rise-up windshield wiper  
Sliding fold-in front window  
Sliding side window(LH)  
Lockable door  
Hot & cool box  
Storage compartment & ashtray  
Transparent cabin roof-cover  
Radio / USB player  
Handsfree mobile phone system with USB  
12 volt power outlet (24V DC to 12V DC converter)  
Sun visor

### Computer aided power optimization (New CAPO) system

3-power mode, 2-work mode, User mode  
Auto deceleration & one-touch deceleration system  
Auto warm-up system  
Auto overheat prevention system

### Automatic climate control

Air conditioner & heater  
Defroster

### Self-diagnostics system

### Starting Aid (air grid heater) for cold weather

### Centralized monitoring

LCD display  
Engine speed or Trip meter/Accel.  
Clock  
Gauges  
Fuel level gauge  
Engine coolant temperature gauge  
Hyd. oil temperature gauge  
Warnings  
Check Engine  
Overload  
Communication error  
Low battery  
Air cleaner clogging  
Indicators  
Max power  
Low speed/High speed  
Fuel warmer  
Auto idle

### Door and cab locks, one key

### Three outside rearview mirrors

### Mechanical suspension seat with heater

### Pilot-operated slideable joystick

### Console box height adjust system

### Four front working lights

### Electric horn

### Batteries (2 x 12V x 160 AH)

### Battery master switch

### Removable clean-out dust net for cooler

### Automatic swing brake

### Removable reservoir tank

### Fuel pre-filter with fuel warmer

### Boom holding system

### Arm holding system

### Track shoes (600mm, 24")

### Track rail guard

### Accumulator for lowering work equipment

### Lower frame under cover (normal)

## OPTIONAL EQUIPMENT

### Fuel filler pump (50 L/min)

### Beacon lamp

### Safety lock valve for boom cylinder with overload warning device

### Safety lock valve for arm cylinder

### Single-acting piping kit (breaker, etc.)

### Double-acting piping kit (clamshell, etc.)

### Quick coupler

### Travel alarm

### Booms

6.25 m, 20' 6"

6.25 m, 20' 6" Heavy Duty

10.2 m, 33' 6" Long reach

### Arms

2.1 m, 6' 11"

2.5 m, 8' 2"

3.05 m, 10' 0"

3.75 m, 12' 4"

3.05 m, 10' 0" Heavy Duty

7.85 m, 25' 9" Long reach

### Cabin FOPS/FOG (ISO/DIS 10262) Level 2

FOPS (Falling Object Protective Structure)

FOG (Falling Object Guard)

### Cabin ROPS (ISO 12117-2)

ROPS (Roll Over Protective Structure)

### Cabin roof - Steel cover

### Cabin lights

### Cabin front window rain guard

### Track shoes

Triple grousers shoe (700 mm, 28")

Triple grousers shoe (800 mm, 32")

Triple grousers shoe (900 mm, 36")

Double grousers shoe (700 mm, 28")

Full track rail guard

### Lower frame under cover (additional)

### Pre-heating system, coolant

### Tool kit

### Operator suit

### Rearview camera

### Seat

Adjustable air suspension seat with heater

### Pattern change valve (2 patterns)

### Hi-mate (Remote Management System)

## PLEASE CONTACT

\* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to international standards.

\* The photos may include attachments and optional equipment that are not available in your area.

\* Materials and specifications are subject to change without advance notice.

\* All imperial measurements rounded off to the nearest pound or inch.